Wat fijn dat je voor onze service kiest!
Hoe beter je voorbereid bent, hoe sneller wij klaar zijn en hoe eerder je kunt genieten van je eerste espresso. Neem even de tijd voor dit document, of bewaar het voor een rustiger moment.

In dit document vind je alle informatie die je nodig hebt om de installatie van jouw nieuwe espressomachine voor te bereiden. Over de juiste afvoer, stroom- en wateraansluiting lees je hier alles. Ook zijn er verschillende opties om jouw machine op krachtstroom aan te sluiten, en er zijn verschillende filters beschikbaar. Welk type filter bij jou past, adviseren wij je graag. Je hoeft alleen rekening te houden met de ruimte onder de machine. Verder vind je een voorbeeld van de opstelling van jouw werkplek. Twijfelt je ergens over? Neem dan gerust contact met ons op, dan denken wij met je mee over de perfecte opstelling.

Hoe verloopt zo'n installatie?
Een installatie duurt gemiddeld twee uur als het gaat om een machine met één molen. Is er meer apparatuur, zoals een boiler of meerdere molens, dan kan het iets langer duren. Wij streven ernaar de installatie altijd met twee collega's uit te voeren. Lukt dat een keer niet, dan vragen wij je om even een handje te helpen met tillen. Hoe beter de installatie is voorbereid, hoe sneller het gaat.
Is de voorbereiding onvoldoende en moeten nog een bezoek inplannen, dan kunnen wij dat in rekening brengen.

Na afloop van de installatie krijg je een uitgebreide technische uitleg over de apparatuur.
Het is vaak verstandig om jouw koffieleverancier te laten aansluiten wanneer wij klaar zijn. Zo kun je meteen de perfecte espresso serveren. Natuurlijk proeven wij graag met je mee!

ENGLISH

We're glad you've chosen us to take care of the installation!
A little preparation goes a long way. The better everything is set up beforehand, the smoother the installation will be and the sooner you'll be pulling your first espresso. So take a few minutes to go through this guide or save it for later.

We've put together everything you need to know before we arrive. You'll find practical information about the required drainage, electrical supply and water connection, along with the different options for connecting your machine to a three-phase power supply.
We'll also help you choose the right water filtration system for your setup. There are several options available and we're happy to advise you on which one works best. Just make sure there's enough room underneath the machine to accommodate the filter.
To help you plan ahead, we've included an example of how your coffee station could be arranged.
Not sure whether everything is in the right place or have questions about the connections? Just get in touch. We'll be happy to think things through with you and help make sure everything is ready for installation.

What to expect on installation day
For a setup with one grinder, installation usually takes around two hours. If your setup includes additional equipment, such as a boiler or multiple grinders, we'll need a little more time.
Whenever possible, we send two of our technicians to carry out the installation. If that's not possible, we may ask you to lend us a hand when it comes to moving or lifting the equipment.
Having everything ready before we arrive makes a big difference. If essential preparations haven't been completed and we need to arrange another visit, additional costs may apply.

Once everything is installed, we'll walk you through the technical side of your new equipment, so you know exactly how everything works. It’s a good idea to have your coffee supplier join us towards the end of the installation. That way, you can get straight to dialing in your coffee and serving your first espresso.
And of course, we’d love to taste it with you!

Wateraansluiting en afvoer

Wateraansluiting	Een beluchte wasmachinekraan, afgemonteerd op een muurplaat. Deze moet minimaal 30cm boven de vloer worden aangebracht. De waterleiding moet voorzien zijn van een terugslagklep.
Afvoer	40 mm PVC, afgemonteerd met een chiffon. Deze moet +/- 30 cm van de vloer worden aangebracht.

Elektra


Stekkerdozen	2 of meer randaarde stopcontacten 230v voor de koffiemolen(s) en automatische tampers. (*Zie voorbeeld p. 3*)
	1 x 3-fase 400v 16 ampère CEE form stopcontact. Dit is voor de espressomachine. Het vermogen van de machine ligt tussen de 3750 en 5000 watt, afhankelijk van het machine type. (*Zie voorbeeld pagina 2*)

Opstelling/kastruimte


Waterfilter	Bij de machine wordt een waterfilter geleverd. Deze wordt onder het werkblad op de vloer geplaatst. Afmetingen zijn +/- 60 cm hoog, met een doorsnee van 30cm. Indien u een BTW Osmose waterfiltratie gebruikt moet u rekening houden met onderstaande afmetingen en een **230V stroompunt**. (*Zie voorbeeld p. 4*) Diep: 500mm Breed: 500mm Hoog: 600mm
Pomp	Alle La Marzocco machines werken met een externe pomp, houdt er rekening mee dat dit naast het waterfilter nog extra ruimte inneemt onder je machine. (zie voorbeeld-foto p. 4)
	Doorvoer In het werkblad moet een gat komen van minimaal 70mm. Dit is bedoeld voor de doorvoer van toe- en afvoerslangen en overige stroomdraden.
	Voor een optimale werking van uw espressomachine is waterbehandeling belangrijk. Op basis van de watersamenstelling in uw regio geven wij advies over de juiste filtratie voor uw apparatuur. Voor plaatsing nemen we een watermonster en bespreken wij de mogelijkheden.

Alle voorzieningen zoals aangegeven, moeten aanwezig zijn binnen een straal van 1 meter gemeten vanaf de espressomachine. Zorg ervoor dat de externe pomp en waterfilter makkelijk bereikbaar zijn voor onderhoud. Indien bovenstaande voor plaatsing niet aanwezig is kunnen we plaatsing niet garanderen. De waterkraan is uitsluitend voor de espressomachine spoelstations of andere apparatuur dient op een aparte kraan aangesloten te worden.

Voorbeeld aansluiting 230V espressomachine

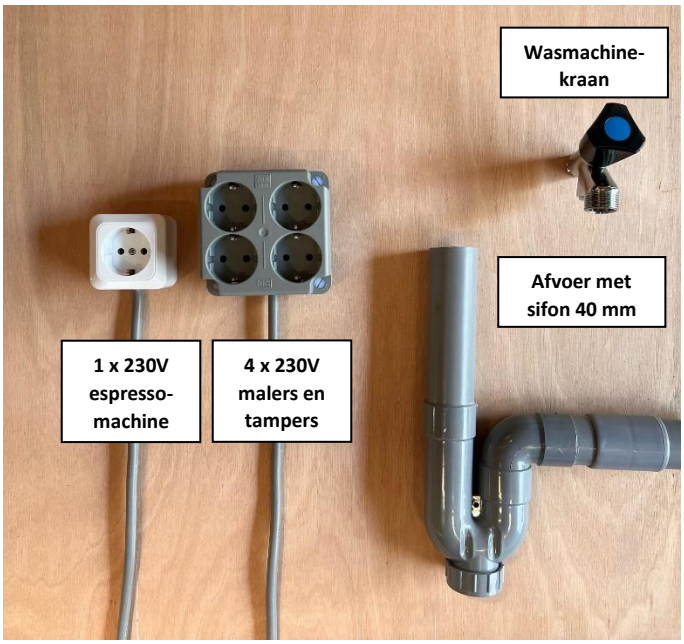

Voorbeeld aansluiting 400V espressomachine

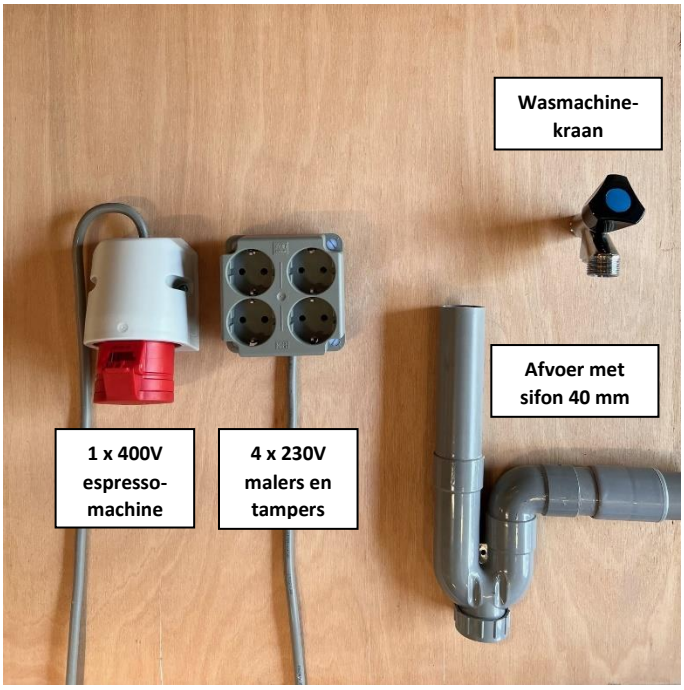

Voorbeeld opstelling waterfilters en pomp (HxBxD in mm)

Rocket



La Marzocco



La Marzocco met BTW Osmose systeem



- SEE ENGLISH VERSION ON THE NEXT PAGE -

Water Connection and Drainage

Water Connection:	An aerated washing machine tap, mounted on a wall plate. This should be installed at least 30 cm above the floor. The water pipe must be equipped with a check valve.
Drainage:	40 mm PVC, fitted with a trap. This should be installed +/- 30 cm from the floor.

Electricity

Sockets:	2 or more earthed sockets 230v for the coffee grinder(s) and automatic tampers. (*See example on p. 6*) 1 x 3-phase 400v 16 ampere CEE form socket. This is for the espresso machine. The power of the machine ranges between 3750 and 5000 watts, depending on the machine type. (See example on p. 6)

Setup/Cabinet Space


Water Filter:	A water filter is provided with the machine. This is placed under the worktop on the floor. Dimensions are approximately 60 cm in height, with a diameter of 30 cm. If you use a BWT Reverse Osmose water filtration system, you must consider the dimensions below and a **230V power socket**. (See example on p. 7) Depth: 500 mm Width: 500 mm Height: 600 mm
Pump:	All La Marzocco machines operate with an external pump, so keep in mind that this will take up additional space under your machine, along with the water filter. (See example photo p. 7)

Through-hole: A hole of at least 70 mm must be made in the worktop. This is intended for the passage of supply and drainage hoses and other power cables.


For optimal performance of your espresso machine, water treatment is important. Based on the water composition in your region, we provide advice on the proper filtration for your equipment. Before installation, we take a water sample and discuss the possibilities.

All facilities as indicated must be present within a radius of 1 meter measured from the espresso machine. Ensure that the external pump and water filter are easily accessible for maintenance. If the above requirements are not met before installation, we cannot guarantee the placement. The water tap is exclusively for the espresso machine rinsing stations; any other equipment must be connected to a separate tap.

Example connection for 230V espresso machine

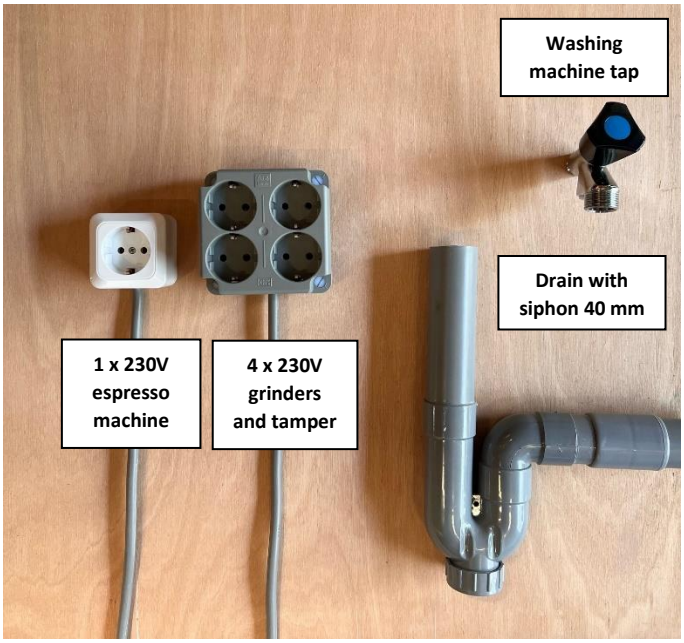

Example connection for 400V espresso machine

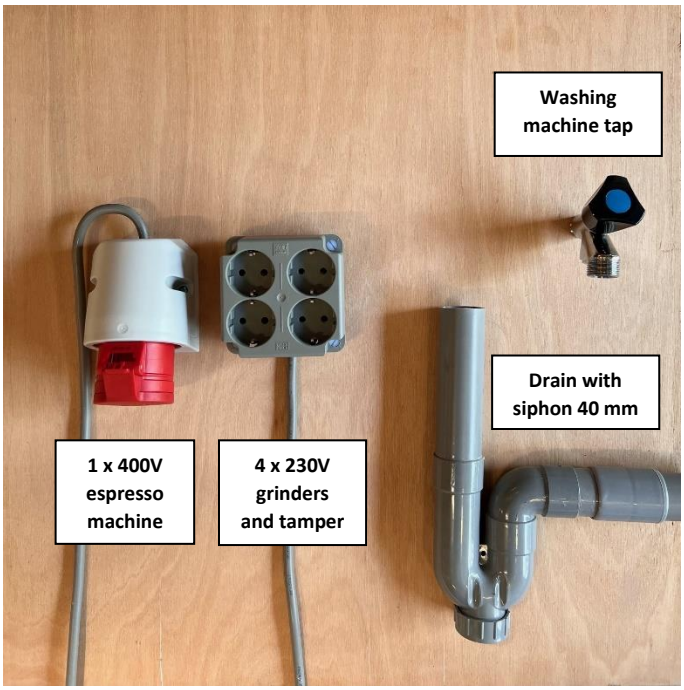

Example setup for water filters and pump (HxWxD in mm)

Rocket




La Marzocco




La Marzocco with BWT Reverse Osmose




Workflow opstelling van links naar rechts

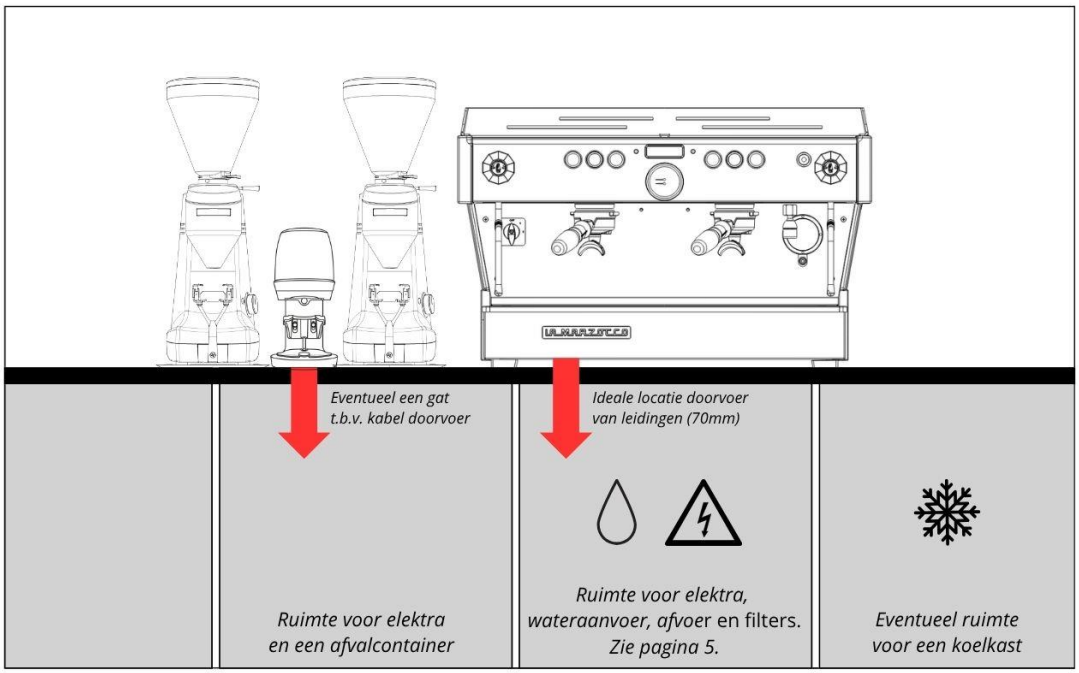

Workflow opstelling van links naar rechts - Bovenaanzicht

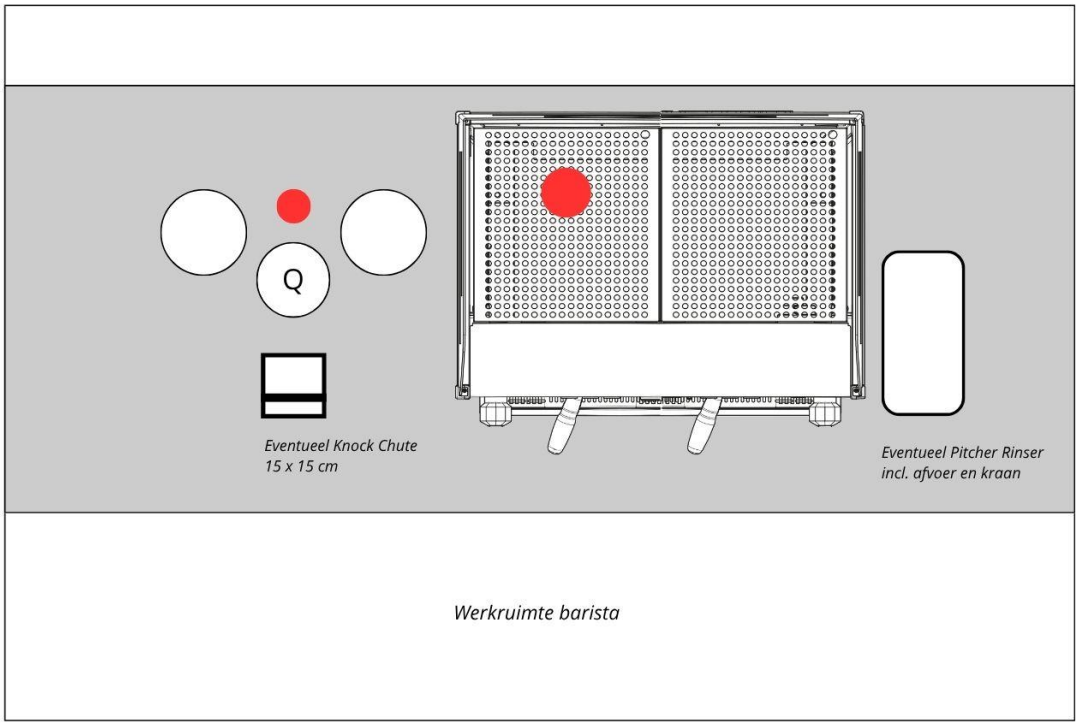

Workflow opstelling van rechts naar links

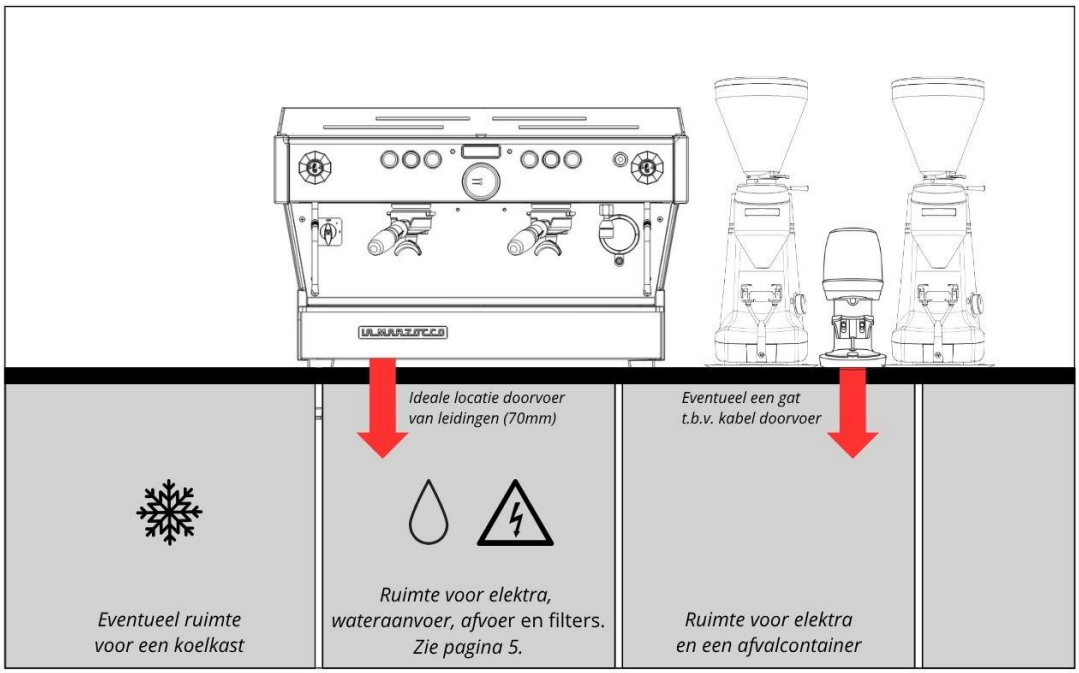

Workflow opstelling van rechts naar links - Bovenaanzicht

